50/60Hz Type 2 Portable EV Charger With Control Box AC 230V Current Adjustable Home EV Charger

Basic Information

- Place of Orig
- Brand Name:
- Certification:
- Model Number
- Minimum Ord
- Price:

M

MINKO

- Packaging De
- Delivery Time
- Payment Terr
- Supply Ability

jin:	China		
:	MINKO		
	CE(ICR lab), UKCA, ROHS, ISO, REACH		
er:	Q16EU-16A		
der Quantity:	5 pieces		
	negotiation		
etails:	L210xW85xH52 (mm)		
e:	8 -10 working days		
ms:	T/T, Western Union, MoneyGram,Paypal,Skrill,Transferwise		
y:	1000000 pieces per month		



Product Specification

- Charging Plug:
- Rated Voltage: Rated Current:
- Rated Power:
- Input Power:
- Operating Temperature:
- Frequency:
- Electric Cable:
- Highlight:

IEC 62196 Type2				
AC 230V / Single Phase				
16A				
3.68kW				
250V Max				
-35°C To 50°C				
50/60Hz				
IP65 Circuit Breaker				

50hz portable ev charger level 2, 60hz portable ev charger level 2, 230v portable car electric charger



More Images



Our Product Introduction

50/60Hz Type 2 Portable EV Charger With Control box AC 230V Current Adjustable Home EV Charger

Detailed specification:

Portable EV Charger, with power ratings of 3KW, 7 kW, is suitable for different types of vehicles.

Adjustable current, suitable for various scenarios.

The Voltage and Current are stable during charging, which can protect the battery and delay using time.

We can use normally in ultra-high temperature environment up to 50°C.

It can also be used normally in the -35°C.

EN Standard Strong Patience.

The charging cable meets the latest EN standard request of an electric vehicle charging cable. Highly resistant to the cold & heat.

with the cable maintaining flexibility at -40°c, therefore withstanding colder conditions. **TPU Cable.**

Highly resistant to bending, protecting the internal wiring harness to function normally under repeated bending conditions. Climate Friendly Stronger & Anti-aging.

The halogen-free charging cable is climate friendly, meeting the EU's and USA's environmental standards. The tight, strong molecular structure provides a long-lasting charging cable solution, ensuring greater service life.

Arcing Design.

Unique self-cleaning' design ensures that impurities on the surface of the pins can be removed during each plug-in process. **Ergonomic Design and Integrated Design**

Angled horizontal bending design, in line with the habit of manual force which allows for convenient plugging & unplugging. K10 rated with an integrated design ensuring that you can charge safely in all weather conditions.

Better Conductivity.

Silver plating on the pins ensures greater conductivity, charging efficiency and reduces heat generation. **Temperature Monitoring**

Detects if the temperature is higher than the 'set safe' value, if this occurs, the current will automatically be cut off.

Charging plug	Туре 2		Type 1				
Model No.	Q16EU-16A	Q32EU-32A	Q16US-16A	Q32US-32A			
Rated voltage	AC 230V / Single phase		AC 110-240V/ Single phase				
Rated	8, 10, 12, 14,	8, 12,14,16, 20, 24,	8, 10, 12, 14,	8, 12, 14, 16, 20, 24,			
current		28, 32A adjustable	16A adjustable	28, 32A adjustable			
Rated power	3.68kW	7.36kW	3.84kW	7.68kW			
Certificates	CE, UKCA, ROHS,ISO, REACH, FCC						
Protection rank	IP65						
Earth							
leakage	30m AC						
protector							
input power	250V Max						
length	European standard, Default 5M US standard, Default 7.4M						
start method	Plug and Play						
Operating temperature	-35°C to 50°C						
electrical protection	Over current protection, residual current protection, grounding protection, surge protection, Over voltage /under voltage protection, over voltage/ under frequency protection, over temperature protection						
Applied Materials	Housing: Black thermoplastic PC940. Corrosion and wear protection. Cable: 4.5M black with TPU jacket. With CE and TUV mark issued by TUV.						
Warranty	1 Years for the whole machine						

Feature:

1. The product complies with the Low Voltage Directive 2014/35/EU, IEC61851-1:2019


2.IP65, weatherproof; leakage protection; impact resistance

3. Charging status and working error are simply displayed by LED indicator light and LCD screen

4. Optional unction of current selection button,

5. 8A-32A free switching current


for more products please visit us on evstationcharger.com

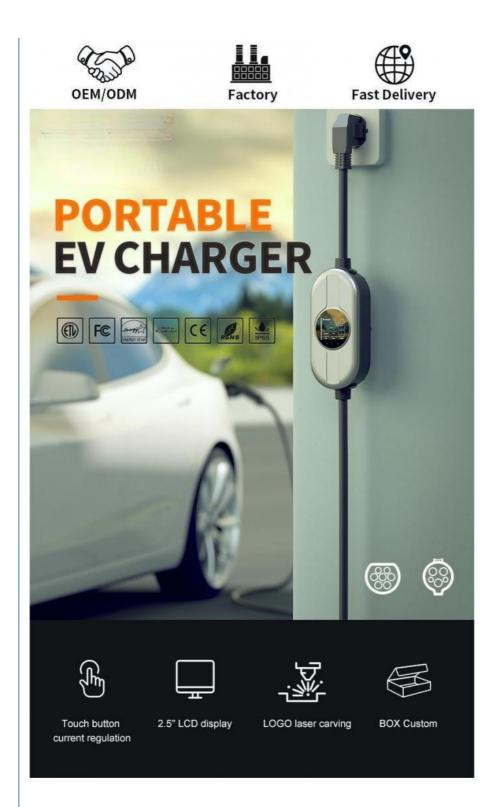


WATERPROOF AND DUSTPROOF

-20 ° C~80C working temperature

Innovative design to easily cope with severe indoor and outdoor environments such as cold, rain, snow, sand and dust, and high temperature

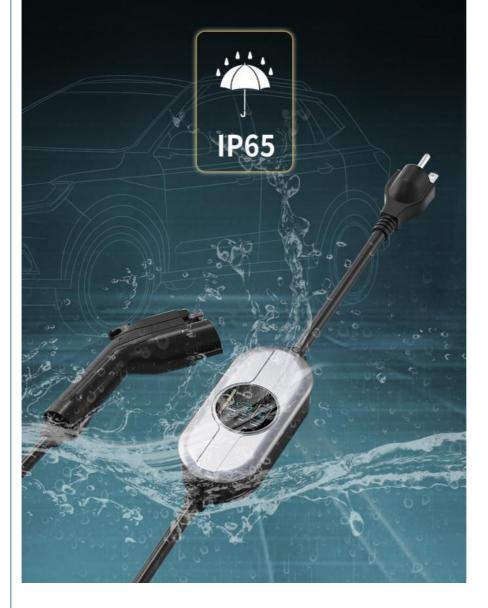



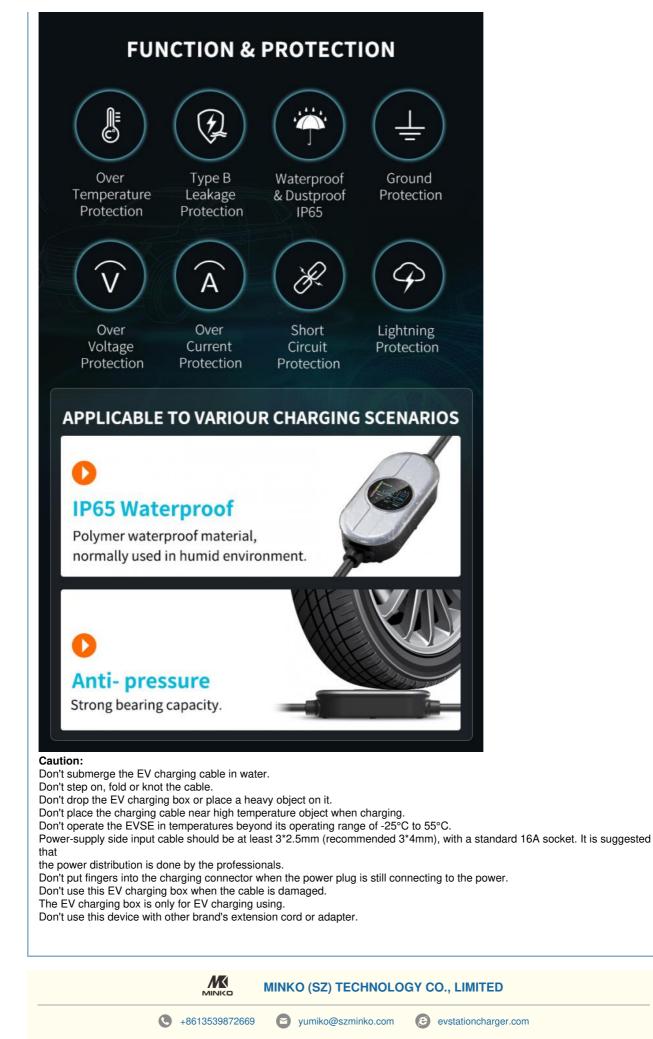

309 West Lake Industrial Zone, Cuishan Road, Dongxiao Street, Luohu District, SZ