## EU Standard Portable EV Cahrger 8-16A Type 2 New Energy Vehicle Home Fast Charging Pile AC 230V

## **Basic Information**

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 5
- Price:

**Our Product Introduction** 

for more products please visit us on evstationcharger.com

- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:

	China	
	MINKO	
	CE(ICR lab), UKCA, ROHS, ISO, REACH	
	W16EU-16A	
Quantity:	5 pieces	
	negotiation	
s:	L210xW85xH52 (mm)	
	8 -10 working days	
	T/T, Western Union, MoneyGram,Paypal,Skrill,Transferwise	
	1000000 pieces per month	



## **Product Specification**

- Charging Plug:
- Rated Voltage:Rated Current:
- Rated Power:
- Hated I ower.
- Input Power:
- Operating Temperature:
- Frequency:
- Electric Cable:
- Highlight:

IEC 62196 Type2			
AC 230V / Single Phase			
16A			
3.68kW			
250V Max			
-35°C To 50°C			
50/60Hz			
IP65 Circuit Breaker			

230v type 2 portable charger, 16a ev portable chargers type 2, 8a ev portable chargers type 2



## More Images



#### EU Standard Portable EV Cahrger 8-16A Type 2 New Energy Vehicle Home Fast Charging Pile AC 230V

#### **Detailed specification:**

Portable EV Charger, with power ratings of 3KW, 7 kW, is suitable for different types of vehicles.

Adjustable current, suitable for various scenarios.

The Voltage and Current are stable during charging, which can protect the battery and delay using time.

We can use normally in ultra-high temperature environment up to 50 °C.

It can also be used normally in the -35°C.

#### **EN Standard Strong Patience.**

The charging cable meets the latest EN standard request of an electric vehicle charging cable. Highly resistant to the cold & heat,

with the cable maintaining flexibility at -40°c, therefore withstanding colder conditions. **TPU Cable.** 

Highly resistant to bending, protecting the internal wiring harness to function normally under repeated bending conditions. Climate Friendly Stronger & Anti-aging.

The halogen-free charging cable is climate friendly, meeting the EU's and USA's environmental standards. The tight, strong molecular structure provides a long-lasting charging cable solution, ensuring greater service life.

#### Arcing Design.

Unique self-cleaning' design ensures that impurities on the surface of the pins can be removed during each plug-in process. Ergonomic Design and Integrated Design

Angled horizontal bending design, in line with the habit of manual force which allows for convenient plugging & unplugging. K10 rated with an integrated design ensuring that you can charge safely in all weather conditions.

#### Better Conductivity.

Silver plating on the pins ensures greater conductivity, charging efficiency and reduces heat generation. Temperature Monitoring

Detects if the temperature is higher than the 'set safe' value, if this occurs, the current will automatically be cut off.

Model	W16EU-16A	W32EU-32A		
Input / Output Voltage	AC 230V/ Single phase	AC 230V/ Single phase		
Input / Output Current	8, 10, 12, 14, 16A adjustable	8, 10,12,14,16A, 20, 24, 28,32A adjustable		
Power	3.68KW	7.36KW		
Frequency 50/60Hz				
Input Plug	Schuko	CEE 3-Pin		
Output Plug	Type2(Mennekes)			
Output Cable	5M			
Withstand Voltage	3000∨			
Work Altitude	<2000M			
Stand by	<3W			
Protection	over voltage protection, over load protection, over-tempprotection, under voltage protection, earth leakageprotection, lightning protection, short circuit protection			
IP level	IP65			
Touch Button	Yes			
LCD Screen	Yes			
Current Adjustmen t	Yes			
Timing / Appointme nt				
Certificatio n	CE, RoHS			

#### Feature:


1. The product complies with the Low Voltage Directive 2014/35/EU, IEC61851-1:2019

2.IP65, weatherproof; leakage protection; impact resistance

3. Charging status and working error are simply displayed by LED indicator light and LCD screen

4. Optional unction of current selection button,

5. 8A-32A free switching current

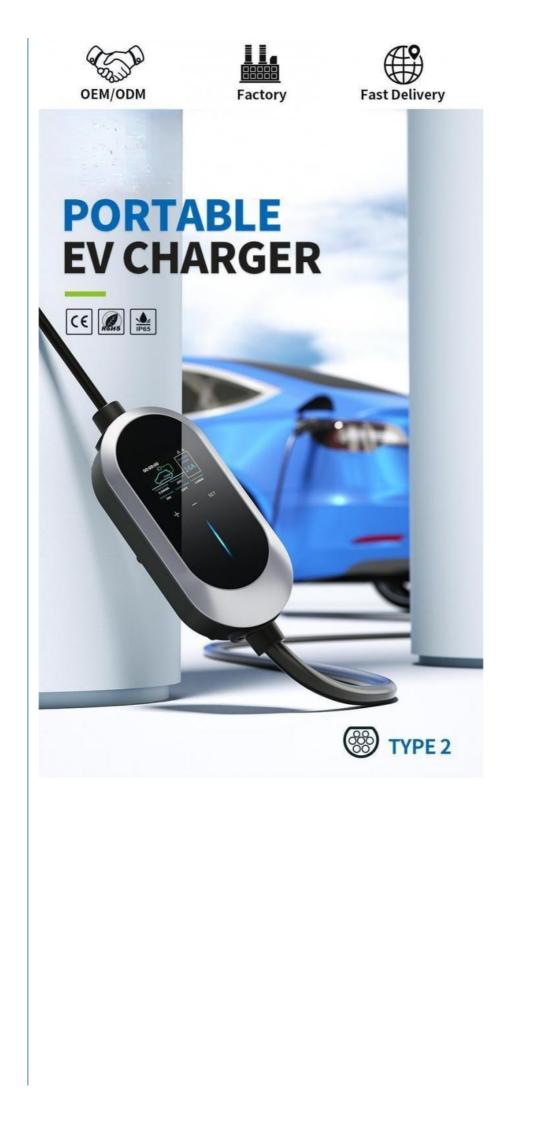








**BOX** Custom

Touch button current regulation

2.5" LCD display

LOGO laser carving




# WATERPROOF AND DUSTPROOF

# -20 ° C~80C working temperature

Innovative design to easily cope with severe indoor and outdoor environments such as cold, rain, snow, sand and dust, and high temperature





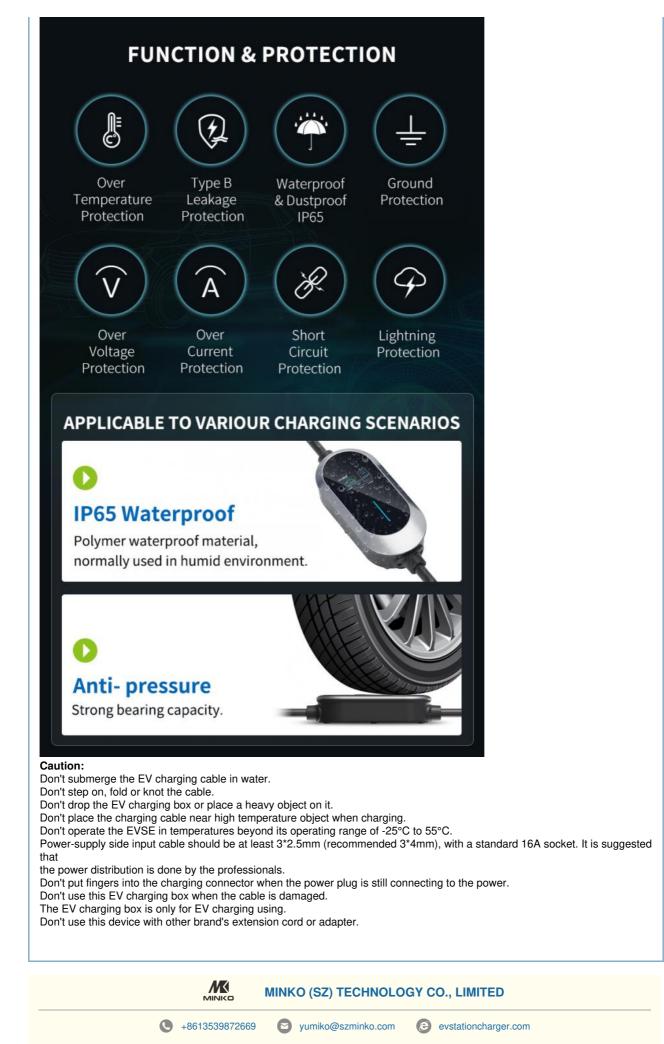

309 West Lake Industrial Zone, Cuishan Road, Dongxiao Street, Luohu District, SZ