

# Portable Power Station 400W Max Solar Charging Input LiFePO4 Battery Solar Generator

### **Basic Information**

Place of Origin: China
Brand Name: MINKO
Certification: CE, ROHS

Model Number: Portable Power Station-Q1000

Minimum Order Quantity: 5 piecesPrice: negotiation

Packaging Details: L210xW85xH52 (mm)
 Delivery Time: 8 -10 working days
 Payment Terms: T/T, Western Union,

MoneyGram,Paypal,Skrill,Transferwise

• Supply Ability: 1000000 pieces per month



## **Product Specification**

Rated Power AC: 1000W
Capacity: 1008Wh
Power Indicate: LCD Display
Solar Charging Input: 400W Max
AC Fully Charging Time: About 2-3H
Housing Material: ABS+PC
Operation Humidity: 10%~90%

 Highlight: Rechargeable Portable Power Station 400w, Rechargeable Portable Power Station UPS,

LIFEPO4 portable rechargeable power station



## More Images



### **Product Description**

## Portable Power Station 400W Max Solar Charging Input LiFePO4 Battery Solar Generator

#### **Description of Portable Power Station**

Portable power station is equipped with 1008Wh LiFePO4 Battery pack, which contains upgraded chip, supports fast charging function and more than 3000 recycling times. Pure Sine Wave technology AC outlets deliver stable and safe power, without damage and reduces audible and electrical noise.

#### Features:

Bidirectional fast charge technology
UL car grade safer lithium iron phosphate cycle life 3000+
super inverter technology
UPS uninterrupted power supply
1000W rated output
sufficient large capacity 1 KWH electricity shape IP Armor warrior
smaller volume, lighter weight and more portable than other

**Apply to:**Home emergency, small household appliances, digital products (such as UAV, mobile phone, computer, notebook,camera, handheld head, car refrigerator, etc.), long-distance self-driving travel, outdoor camping, lighting, picnic, wild fishing,environmental monitoring, geological exploration, car electricity, medical equipment and other scenes.

#### **Product Specification**


Product Specification	
Rated Power AC	1000W
Capacity	1008Wh (48V/21Ah or 3.2V/315000mAh)
Battery type	LiFePO4
Power Indicate	LCD display
LCD Display	Battery remaining capacity, Battery fault, total output power, Over temperature, input power, Charge time, discharge time
AC Input	500W
AC fully Charging Time	About 2-3H
Solar Controller Model	MPPT
Solar Charging Input	400W max
Charging Temperature Range	32~104°F(0°C~40°C)
USB Output	Type-C output:PD 100W
	USB-A output:QC3.0(18W/5V3A,9V2A,12V1.5A)*3(total 54W)
Cigarret Lighter output	12V/10A(120W)
DC output	12V/5A/DC5521*2(total 120W)
LED light	6-10W
	SOS,flashlight
AC Output	Output waveform:pure sinewave
	Output voltage:110V(US/JP) or 220V(EU/UK/AU/CN) (AC output voltage and frequency are customized,according to different countries and regions.Please refer to the actual product)
	Output frequency: 50/60Hz
	AC continuous output
	AC continuous output: 2000W
Discharging Temperature Range	14~104°F(-10~40°C)
Product size/Weight	328*221*263mm/about 11Kg
Carton Size/Weight	32.5*25*36.5CM/about 13.3Kg/1PCS
Protections	over-charging, short-circuit ,low-voltage,over-temperatature and over-discharging protection
Color	Oranger+gray,Blue+gray,Red+gray,Green+gray
Housing Material	ABS+PC (fireproofing V0)
Working Temperature	-15~45°C
Operation Humidity	10%~90%
Standard Package Include	1*Q2400 portable power supply, ,1*User Manual, ,color box packaging,1*MC4 charging cable, 1*vehicle charging cable,1 AC cable
Warrantly	12 months

### 9 Protections Strictly Abide By Charging Safety

Overcurrect protection
Short-circuit protection
Over discharge protection
Low temperature protection
High temperature protection
Overvoltage protection
Overload protection
Signal interference protection
Overcharge protection




## Different Sockets Available Upon Your Requests

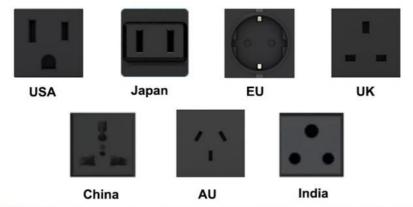



## **Function Panel**

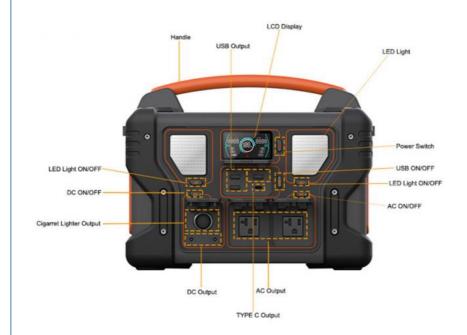



## More use scenarios



















MINKO (SZ) TECHNOLOGY CO., LIMITED







yumiko@szminko.com evstationcharger.com



309 West Lake Industrial Zone, Cuishan Road, Dongxiao Street, Luohu District, SZ